

# SOUL MELANGE


## COLOUR 8810-61199



Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

## COLOUR SCALE

Design no. 8810 Soul Melange (170 cm/67") is available in 37 colours

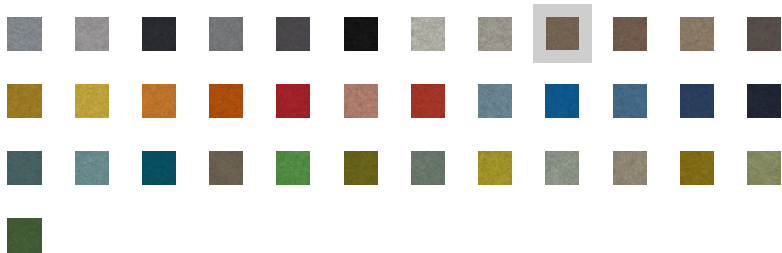

Soul Melange is a multi-coloured felt fabric in an exclusive blend of natural wool fibres and polyester. It is highly suitable for various types of vertical surfaces, screens and panels. Use Soul Melange alone or in combination with the unicoloured wool felt Soul and its complimentary colour palette of beautiful solids.

Meets Möbelfakta requirements

Designed by: Inger Mosholt Nielsen  
Colours designed by: Cenk Kivrikoglu



## PRODUCT SPECIFICATIONS

## CHARACTERISTICS

### Design no.

8810 — Soul Melange

### Application

Panel

Screen

### Composition

84% Wool, 16% Polyester

### Weight

330 g/lm — 10.64 oz/lin.yd

### Width

170 cm — 67 inches

## PERFORMANCE

### Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

### Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

### Flammability

BS EN 1021 1&2 Cigarette and Match

BS 476 Part 7 class 1

ASTM E 84 Class 1(Adhered)

ASTM E 84 Class 1(Unadhered)

Will also pass other flammability standards.  
Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

### US ACT pass

 ASTM E 84 Class 1(Adhered)

 ASTM E 84 Class 1(Unadhered)

## CERTIFICATES

### ACOUSTIC TEST AIR FLOW RESISTANCE

| Test                                       | Condition | No.        | Date        | Download            |
|--------------------------------------------|-----------|------------|-------------|---------------------|
| EN 29053 & ISO 9053-1 (airflow resistance) |           | M104146/48 | 07 Mar 2019 | <a href="#">PDF</a> |

### COLOUR FASTNESS TO LIGHT

| Test                       | Condition | No.        | Date        | Download            |
|----------------------------|-----------|------------|-------------|---------------------|
| BS EN ISO 105 B02 Method 2 |           | 2022AN0028 | 28 Jan 2022 | <a href="#">PDF</a> |

### DRY AND WET RUBBING/CROCKING

| Test                              | Condition | No.      | Date        | Download            |
|-----------------------------------|-----------|----------|-------------|---------------------|
| BS EN ISO 105-X12 Rubbing dry/wet |           | 89753    | 29 Sep 2017 | <a href="#">PDF</a> |
| BS EN ISO 105-X12 Rubbing dry/wet |           | 787364-1 | 12 Dec 2017 | <a href="#">PDF</a> |

### FLAMMABILITY

| Test                               | Condition          | No.       | Date        | Download            |
|------------------------------------|--------------------|-----------|-------------|---------------------|
| BS EN 1021 1&2 Cigarette and Match | 35 kg/m3 CMHR foam | 85759-02  | 14 Aug 2017 | <a href="#">PDF</a> |
| BS 476 Part 7 class 1              |                    | 85760-02  | 14 Aug 2017 | <a href="#">PDF</a> |
| ASTM E 84 Class 1(Adhered)         | Adhered            | 24-002139 | 01 Oct 2024 | <a href="#">PDF</a> |
| ASTM E 84 Class 1(Unadhered)       | Unadhered          | 22-003489 | 09 Nov 2022 | <a href="#">PDF</a> |

#### RUBBING WITH ORGANIC SOLVENTS

| Test                               | Condition | No.   | Date        | Download            |
|------------------------------------|-----------|-------|-------------|---------------------|
| BS EN ISO 105-D02 Organic solvents |           | 89753 | 29 Sep 2017 | <a href="#">PDF</a> |

#### COLOUR FASTNESS TO RUBBING WITH FOAM DETERGENT

| Test                   | Condition | No.   | Date        | Download            |
|------------------------|-----------|-------|-------------|---------------------|
| BS EN ISO 105-X12 Foam |           | 89753 | 29 Sep 2017 | <a href="#">PDF</a> |

#### COLOUR FASTNESS TO WATER SPOTTING

| Test              | Condition | No.   | Date        | Download            |
|-------------------|-----------|-------|-------------|---------------------|
| BS EN ISO 105-E16 |           | 89753 | 29 Sep 2017 | <a href="#">PDF</a> |

#### COLOUR FASTNESS TO WATER (STAINING AND CHANGE IN COLOUR)

| Test                                       | Condition | No.   | Date        | Download            |
|--------------------------------------------|-----------|-------|-------------|---------------------|
| BS EN ISO 105-E01 Colour fastness to water |           | 89753 | 29 Sep 2017 | <a href="#">PDF</a> |

#### MATERIAL SAFETY DATA SHEET

| Test                       | Condition | No. | Date        | Download            |
|----------------------------|-----------|-----|-------------|---------------------|
| Material Safety Data Sheet |           |     | 30 Sep 2021 | <a href="#">PDF</a> |

## CARE & MAINTENANCE

Regular gentle vacuum cleaning helps to preserve the fabric's attractive colour and appearance.