


JUST


COLOUR 2494-61176

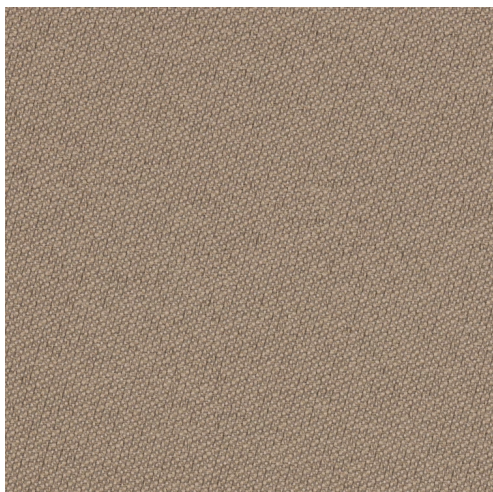

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 2489 Just (140 cm/55") is available in 29 colours

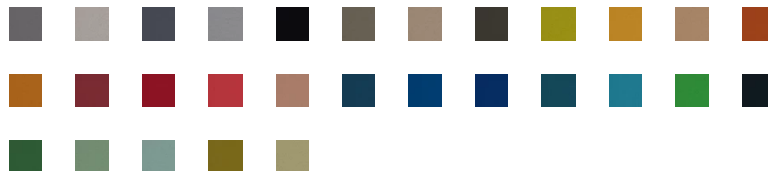

Design no. 2494 Just (170 cm/67") is available in 12 colours



Just is a cross functional fabric in a minimalist and discreet two-toned design. It is made from 100% post-consumer recycled polyester, but contrary to other more shiny and stiff polyester fabrics, Just is exquisitely soft to the touch and has a matt, natural look that imitates the exclusive look and feel of natural textile fibres. Just is available in two widths and is the perfect choice for pods and other types of privacy furniture solutions. All colours in dessin 2489 width 140 cm/55" can also be produced in 170 cm/67". Please contact customer service for more information.

100% recyclable polyester

Meets Möbelfakta requirements

Design and colours are developed by Cenk Kivrikoglu



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2489 / 2494 — Just

Application

Upholstery

Panel

Screen

Composition

100% Post-consumer recycled polyester

Weight

2489: 315 g/lm — 10.16 oz/lin.yd

2494: 385 g/lm — 12.42 oz/lin.yd

Width

2489: 140 cm — 55 inches

2494: 170 cm — 67 inches

US ACT

Pass



[AATCC 8 or 116 Dry/wet crocking](#)



[ASTM D4157-07 Wyz abrasion \(heavy duty.\) 100k](#)



[ASTM D3511 Pilling](#)



[AATCC 16 Light fastness](#)



[CA TB 117-2013](#)



[ASTM E 84 Class 1\(Adhered\)](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan

PERFORMANCE

Abrasion

70,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

6-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

FLAMMABILITY

Certificates

[CA TB 117-2013](#)

[ASTM E 84 Class 1\(Adhered\)](#)

[BS EN 1021 1&2 Cigarette and Match](#)

[BS EN 1021-1 Cigarette](#)

[BS 476 Part 7 class 1](#)

[BS 5852 Part 1 0,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988\(option flame retardant\)](#)

[BS 5852 Crib 5 \(option flame retardant\)](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

CERTIFICATES

ACOUSTIC TEST AIR FLOW RESISTANCE

Test	Condition	No.	Date	Download
EN 29053 & ISO 9053-1 (airflow resistance)		M104146/43	06 Mar 2019	PDF

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	213930	10 Jul 2018	PDF
ASTM D4157-07 Wyz abrasion (heavy duty) 100k		3-25809-2	07 May 2018	PDF

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		98047-04	06 Jun 2018	PDF
ASTM D3511 Pilling		3-25809-3	03 May 2018	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		98051	04 Jun 2018	PDF
AATCC 16 Light fastness		3-25809-0	14 May 2018	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		98051	04 Jun 2018	PDF
AATCC 8 or 116 Dry/wet crocking		3-25809-1	03 May 2018	PDF

COLOUR FASTNESS TO PERSPIRATION

Test	Condition	No.	Date	Download
AATCC 15 Perspiration		3-25811-6	08 May 2018	PDF
BS EN ISO 105-E04		98047-04	06 Jun 2018	PDF

SEAM SLIPPAGE

Test	Condition	No.	Date	Download
ASTM D4034 Yarn slippage at a sewn seam		3-25811-2	09 May 2018	PDF
BS EN ISO 13936-2		98047-04	06 Jun 2018	PDF

BREAKING FORCE

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		3-25811-3	03 May 2018	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
CA TB 117-2013		3-24258-0-RV	29 Jan 2018	PDF
ASTM E 84 Class 1(Adhered)	Adhered	3-24258-1-RV	01 Feb 2018	PDF
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	98047-01	04 Jun 2018	PDF
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	99541	15 Jun 2018	PDF
BS 476 Part 7 class 1		98047-02	31 May 2018	PDF

FLAMMABILITY WITH FLAMERETARDANT TREATMENT

Test	Condition	No.	Date	Download
BS 5852 Part 1 0,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988(option flame retardant)	20-22 kg/m3 non-fire retardant polyurethane foam	23/62444B/09/24	02 Oct 2024	PDF
BS 5852 Crib 5 (option flame retardant)	35 kg/m3 CMHR foam	23/61632N/09/23	11 Dec 2024	PDF

WASH STABILITY

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry	Dimensional Stability to Washing at 60dg.C	98047-04	06 Jun 2018	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		05 Oct 2020	PDF

VOC EMISSION

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		961098C	29 Jan 2021	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

ENVIRONMENTAL DATA

Test	Condition	No.	Date	Download
LCA Summary Report			13 Nov 2024	PDF

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Just is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 2.5%

